

| | |
|------------------|---|
| Model | UL-30 |
| Lamp: | PAR20 Halogen or LED (order separately) |
| Maximum Wattage: | 50 watt, 11 watt LED |
| Input Voltage: | 120VAC |
| Material: | Machined Aluminum |
| Hardware: | Stainless Steel |
| Finishes: | Seven Polyester Powder Coat |
| Lens: | Tempered Clear Glass |
| Cap Accessories: | Holds two accessories (optional) |
| Mounting: | 1/2" NPS (order mount separately) |
| Socket: | Medium base ceramic |
| IP Rating: | 66 |
| Certification: | Wet location |
| Wiring: | 10" 18 ga Teflon Coated |
| Weight: | 2.1 lbs. |
| Warranty: | 10 Years |
| Dimensions: | 3" dia. x 7 1/4" overall |



Shown in Bronze Powder Coat Finish (BZ)



SORAA



BRILLIANCE




METALS:

6061-T6 Aluminum
30° Angled Cap



Mounting Options:

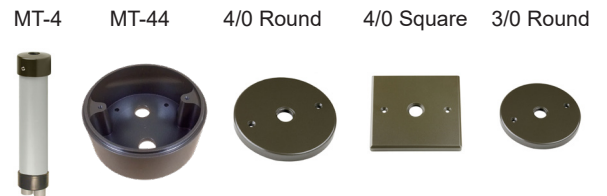

ORDERING LOGIC:

| | | |
|---------|---|--|
| Model: | UL - 30 | |
| Metal: | A - Aluminum | |
| Finish: | BK - Black BZ - Bronze WT - White BG - Beige | BKT - Black Texture BZT - Bronze Texture SL - Silver AC - Aged Copper |



ANODIZING PROTECTION:

To increase the corrosion resistance in our products, we use a three-step process:

1. Machine 6061-T6 copper-free aluminum.
2. Anodized pre-treatment applied.
3. Polyester powder coat finish applied.

ORDERING EXAMPLE: UL - 30 - A - BK