


Specification-grade landscape lighting, wet-location luminaire for down lighting applications. Can be utilized for pergola or tree-mounted installations

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Seven standard TGIC powder coat finishes and clear anodized finish available.
- Remote transformer required.
- SS Cable and lead wire options.
- Stainless steel hardware.
- 1" brass loop for mounting. Hanging hook included.
- 12" 18 ga. shrink tube covered, black wire leads.
- Frosted acrylic liner.
- Optional frosted lens glued in at bottom of fixture.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Listed for wet location use.
- Warranty: 10 Years.

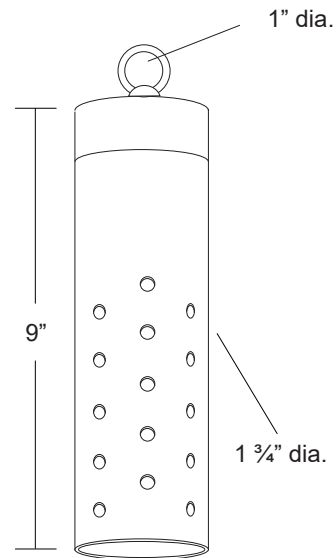

Specifications

MODEL:	RL - 4	LAMPING:	MR11 Halogen (order separately) 20W Maximum (order separately) 3W LED (order separately)
MATERIAL:	6061-T6 Aluminum		
VOLTAGE:	12V		
WATTAGE:	20 Watt		
SOCKET:	GY 6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads.		

Ordering Logic:

MODEL	METAL	BOTTOM LENS	SS CABLE	1/2 WIRE	FINISH	
RL - 4	A - Aluminum	0 - None 1 - Frosted lens glued in	0 - None 5 - 5 ft 10 - 10 ft 15 - 15 ft 20 - 20 ft 25 - 25 ft 30 - 30 ft	0 - None 5 - 5 ft 10 - 10 ft 15 - 15 ft 20 - 20 ft 25 - 25 ft 30 - 30 ft	BK - Black BZ - Bronze WT - White BG - Beige	BKT - Black Texture BZT - Bronze Texture SL - Silver AC - Aged Copper

ORDERING EXAMPLE: RL - 4 - A - 1 - 0 - 0 - BK

Excelsior Lighting, Inc.

PROJECT

TYPE