



Specification-grade landscape lighting, wet-location luminaire for path or garden lighting applications.

- Copper and brass covers available in natural or dark bronze finishes or powder coat finishes.
- Adjustable LED Module: 2W, 4W, 6W, 9W, 12W ( 15W startup draw )
- Available in 2700K or 3000K.
- Field replaceable.
- Remote magnetic transformer required.
- Not compatible with electronic transformers.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Available in heights of 9", 12" or 18".
- Frosted acrylic lens.
- High-temperature silicone O-ring seals are used to seal the cap and body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Listed for wet location use.
- Warranty: 10 Years.

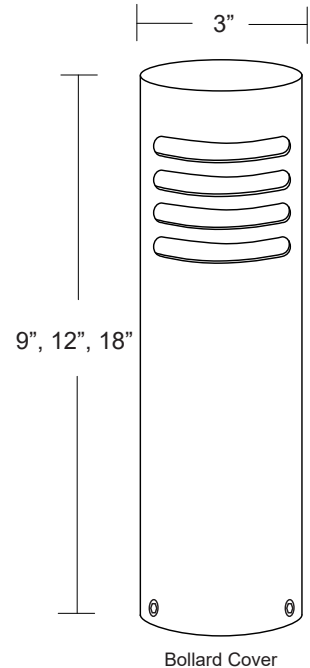

**Mounting Base Options**

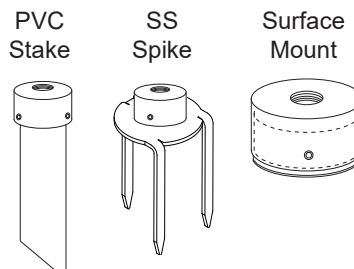

**Specifications**

**MODEL:** PL-20L  
**MATERIAL:** Machined Aluminum, Copper & Brass Bollard Cover  
**VOLTAGE:** 12VAC/DC  
**WATTAGE:** 2W - 12W Adjustable  
**SOCKET:** GY 6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon ® coated leads.

**LAMPING:** 2W-12W Adjustable LED Module

Wattage	2700K	3000K
2W	240 lms.	230 lms.
4W	340 lms.	385 lms.
6W	580 lms.	670 lms.
9W	820 lms.	915 lms.
12W	960 lms.	1165 lms.

**Ordering Logic:**

MODEL	COVER	OPTICS	KELVIN	HEIGHT	MOUNTING BASE	FINISH
PL - 20L	A - Aluminum B - Brass C - Copper	1 - 180° 2 - 360°	27 - 2700K 30 - 3000K	9 - 9" 12 - 12" 18 - 18"	1 - PVC Stake 2 - SS Spike 3 - Surface Mount	BK - Black    BKT - Black Texture BZ - Bronze    BZT - Bronze Texture WT - White    SL - Silver BG - Beige    AC - Aged Copper NT - Natural    DB - Dark Bronze

**ORDERING EXAMPLE:** PL - 20L - B - 1 - 27 - 18 - 1 - NT

**Excelsior Lighting, Inc.**

**PROJECT**

**TYPE**