


Specification-grade direct burial landscape lighting, wet-location luminaire for up lighting applications.

- 12 Watts
- 1,440 Lumens
- 85-265 VAC, Internal Meanwell driver
- 12 x 1 Watt Bridgelux LED
- 15°, 30°, 45°, 60° beams
- RGB, RGBW
- DMX512 in/out waterproof plugs.
- Die-cast aluminum housing, stainless steel top
- Stainless steel hardware
- Tempered clear glass lens
- Mounting: In Ground / Concrete Pour housing included
- Wet location IP67
- UL Certification
- Dimensions: 8" dia. x 3 3/4" height
- Warranty: 5 Years.

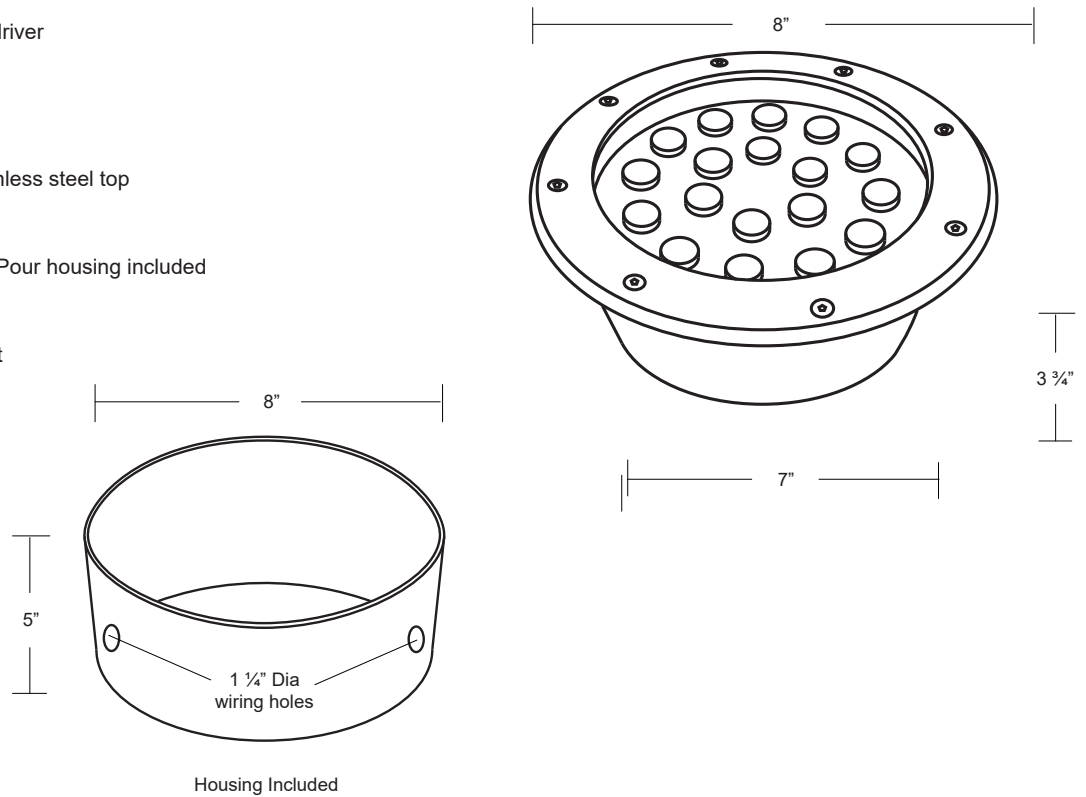

Specifications:

MODEL:	IN - 51L-12	LAMPING:	12 x 1 Watt Bridgelux LED
MATERIAL:	Die-cast aluminum housing, Stainless Steel Top		
VOLTAGE:	85-265 VAC		
WATTAGE:	12 Watts		

Ordering Logic:

MODEL	WATTAGE	KELVIN	BEAM
IN - 51L	12 - 12 Watts	R - RGB	15 - 15°
		RW - RGBW	30 - 30°
			45 - 45°
			60 - 60°

ORDERING EXAMPLE: IN - 51L - 12 - R - 15

Excelsior Lighting, Inc.

PROJECT

TYPE