


- Removable cover with side wiring access through two 1/2" and 3/4" double knockouts.
- 100W and 200W sizes.
- Single circuit breaker.
- Multi-tap outputs of 12V thru 15V.
- 6 foot outdoor cord included.
- 120V input.
- Stainless steel enclosure, NEMA 3R.
- For wall mount applications.
- UL and cUL listed for landscape lighting use.
- Timer and photocell optional.



100 & 200 Watt

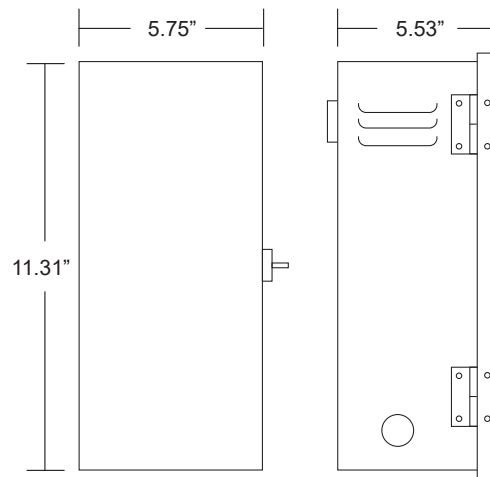

Ordering Logic:

MODEL	WATTAGE	VOLTAGE	OPTIONS
TR - 2	100 - 100 Watts 200 - 200 Watts	120 - 120 Volts	0 - None T - 24-hour Removable Timer P - Built in Photocell TP - 24-hour Removable Timer & Built in Photocell

ORDERING EXAMPLE: TR - 2 - 100 - 120 - T

Excelsior Lighting, Inc.

PROJECT

TYPE